


Data sheet

LED Downlight SDR-070/6W




Product


Model name	SDR-070
Maker	Stardust LED
Voltage	AC85V~265V(50/60Hz)
Power Consumption	6W
Product	LED Downlight
Driver	Include



Lighting Data

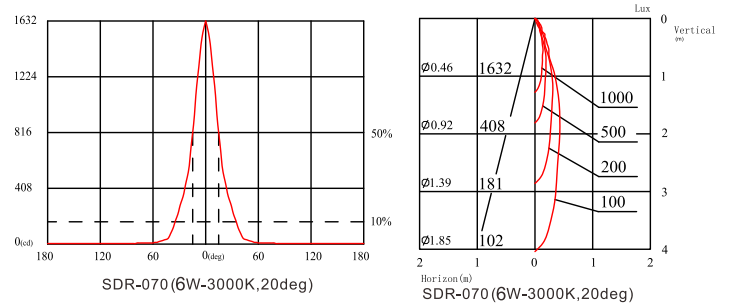

Dimensional drawing (unit: mm)

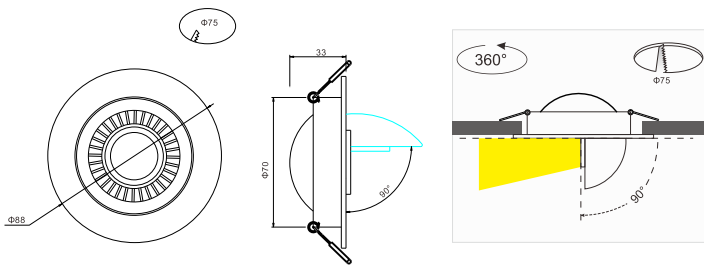

Customer Benefits

- Energy efficient LED directional downlight with single square trim allowing for 360° a lamp rotation.
- With a high power LED and funnel coated in patented reflective technology, this recessed downlight gives a strong, well distributed beam of light which is perfect for general lighting applications where good illumination is essential.


Application

- Houses, Hotels, Shopping center, Museum, Shops, Office Building

Specifications


Model name	SDR-070
Nominal luminous flux(lm)	450 ~ 540
Frequency(Hz)	50/60
Input current(mA)	Max.200
Nominal power consumption(W)	6
Power factor	>0.9
Lumen Maintenance Factor	L70
Dimmable Function	Dimmbar
Nominal beam angle(°)	20°
Operating temperature(°C)	- 20°C ~ + 48°C
Nominal lamp life time(hrs)	50000
Color temperature(K)	2700K ~ 5000K
CRI(Ra)	>80
Rating	IP44
Dimension(mm)	Φ88 × 70
Material	Aluminum
Weight(g)	120
Energy Efficiency Index	A++
Energy consumption(kWh/1000h)	6
Certification	CE

Beam Angle




Installation Instruction


1. Drill a right hole where need to install downlight. Turn off the powerswitch, connect operating voltage.

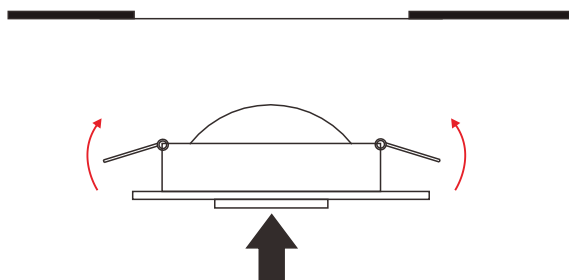


3. Insert the LED downlight to the hole like the picture schows

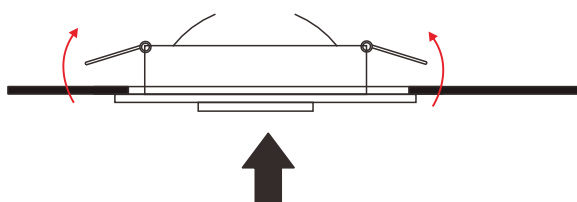

2. Put up spring dump before installing the downlight.

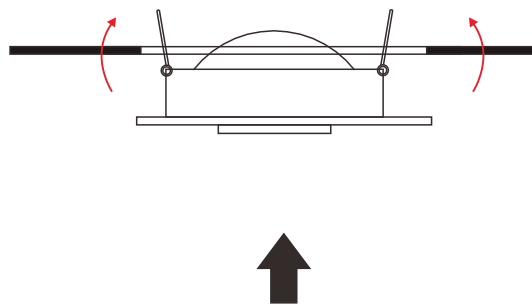

4. Completed the installation.

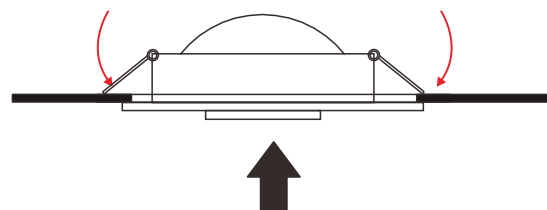

Contact