


2.4G LED CT Controller



Main Characteristics


V2 RF CT Remote Control

- Remote Option: CT
- Working Voltage: 3V DC (Battery CR2032)
- Wireless Frequency: 2.4GHz
- Visual Distance: 30m
- Working Temperature: -20°C~50°C
- Package Size: L150×W46×H18(mm)
- Weight(G.W.): 80g

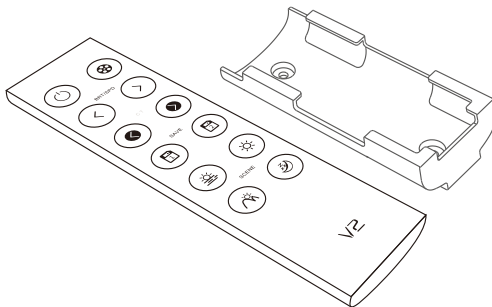


R4-3A CV Receiver

- Input Voltage: 5~24V DC
- Max Current Load: 3A × 4CH Max. 12A
- Max Output Power: 60W/144W/288W(5V/12V/24V)
- Working Temperature: -30°C~55°C
- Package Size: L125×W33×H20(mm)
- Weight(G.W.): 60g



Dimensions

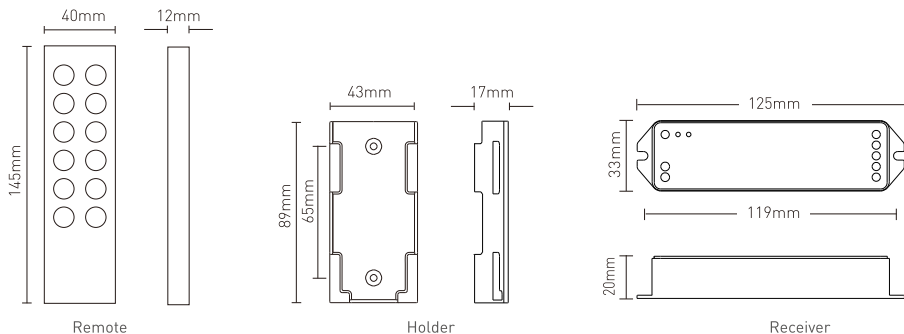

Package

Blister package




Individual package



Receiver

Remote

Operating Instruction for Remote:

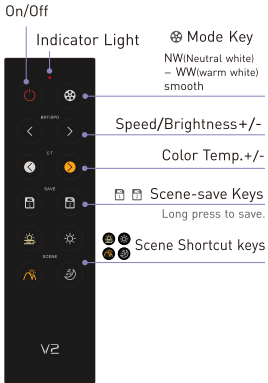

ID learning between the remote and the receiver

Learning ID: Short press "ID learning button" on the R4-3A receiver, the running light keeps on. Then press any key on the remote, the running light on the receiver flicker several times, activated.

Canceling ID: Long press "ID learning button" on the R4-5A receiver for 5 seconds, the running light flicker several times, canceled.


* Unlimited receivers and remotes can be installed within effective distance theoretically.

ID Learning between the remotes

Learning ID: Assuming that remote B match up with remote A, first press the two bottom keys of remote B simultaneously until the indicator light keeps on. Then press any key on remote A in 5 seconds. When the indicator of remote B turns off, ID learning is successful.

Canceling ID: Press the two bottom keys of remote B simultaneously (about 6 seconds), the indicator light keeps on, canceled.

Operating Instruction for Receiver:

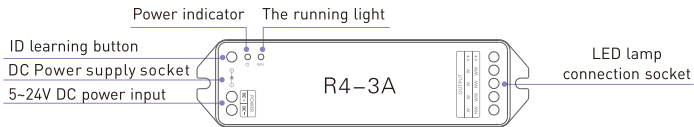

Wiring Diagram :

